


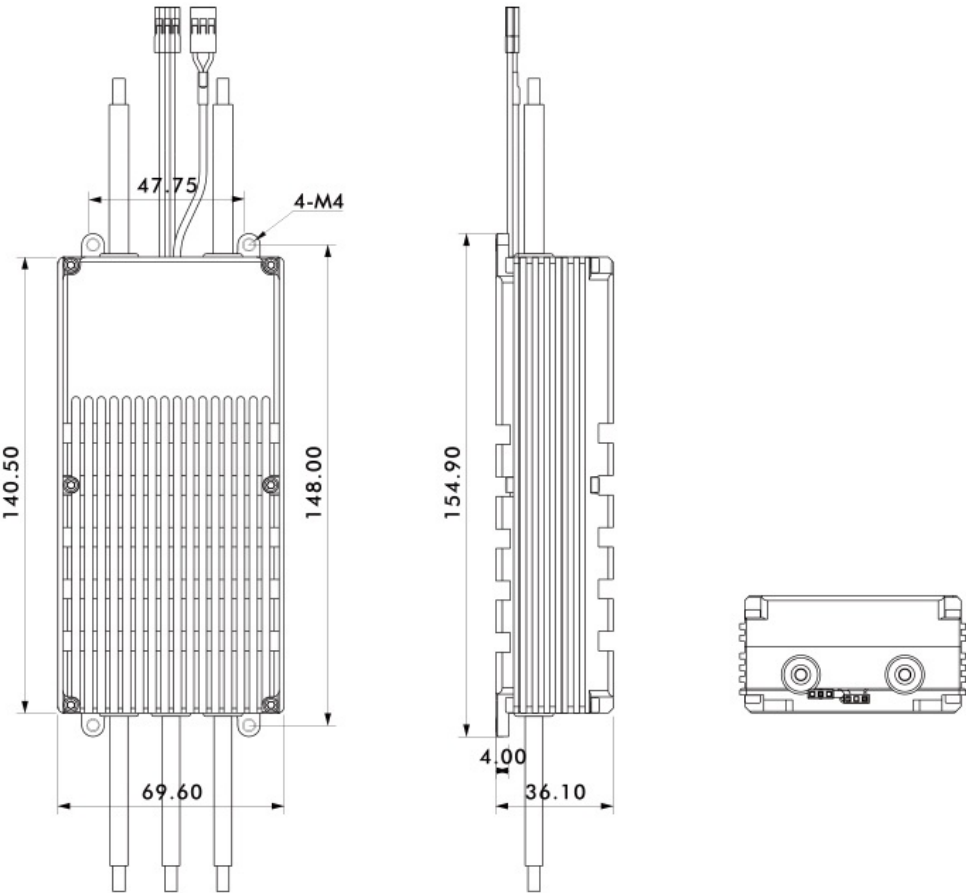

Specification

Model	THUNDER 200A 24S	Con. Current	120A (good cooling space)
Weight (Incl. cables)	620g	Peak current	220A (3s/good cooling space)
Size	154.9*69.6*36.1mm(without wire length)	StandbyConsumption	≤50mA
IP	IP54	Workingtemperature	-20°C~65°C
Support Voltage	12~24S	Signal	PWM
Power Wire	Silicone wire-black/red-8AWG-150mm	PWM throttlePos. range	Calibratable
Motor Wire	Silicone wire-black-10AWG-150mm	PWM voltage	3.3~5V
Signal Wire	UL1533-24AWGSingle core shielded wire-grey-520mm(JR 3Pin male)	PWM frequency	50~400HZ
feedback line	PVCwire-30 cores-black/red/white-100mm (JR 3Pin male)	Data feedbackchannel	UART-TTL(isolatedly power)