

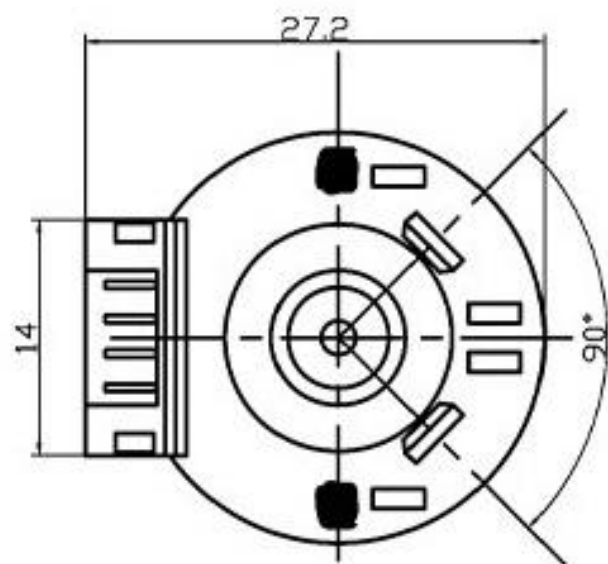


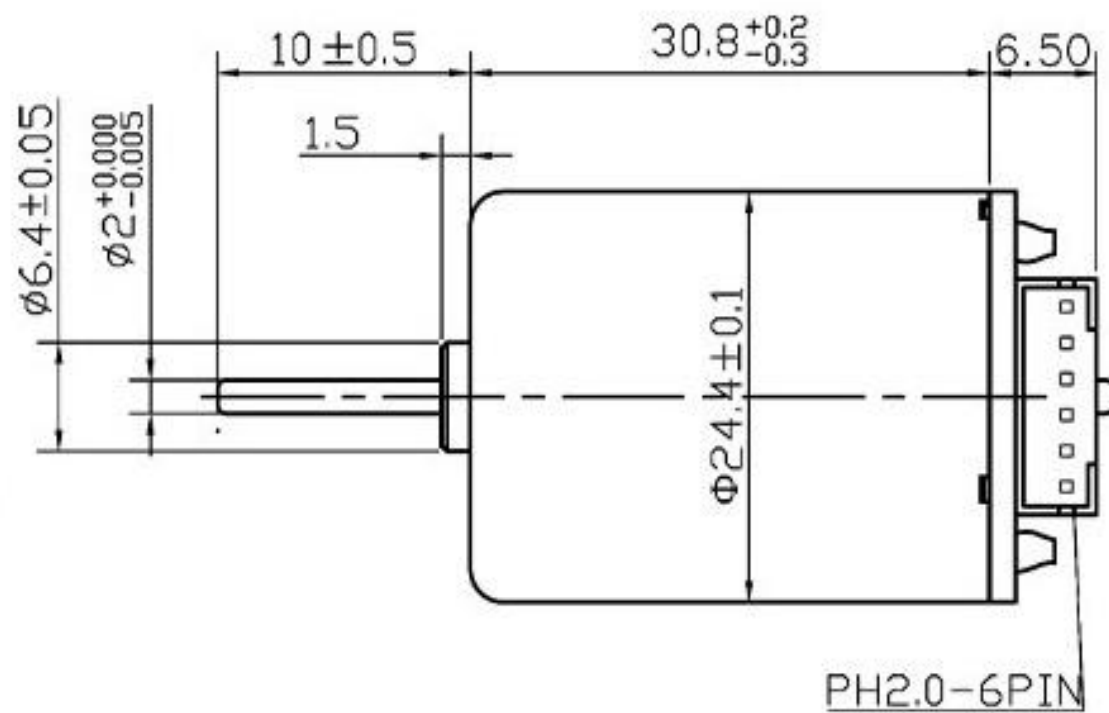

H370-EN motor

Model	H370-EN-6	H370-EN-12-12	H370-EN-12-60	H370-EN-24
Voltage	6V	12V	12V	24V
No-load speed rpm	6000	12000	6000	12000
No-load current mA	90	150	70	110
Rated speed rpm	4850	9700	4810	9400
Rated torque g.cm	28	38	30	35
Rated current mA	420	600	300	300
Power watt	1.4	3.8	2.1	3.4
Stall torque g.cm	150	200	180	190
Stall current A	2.5	5	1.8	2.8

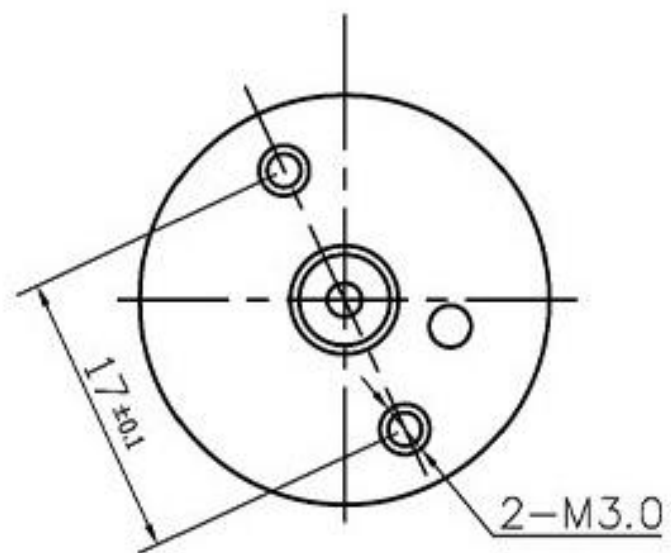


DONGGUAN E-S MOTOR CO.,LTD

Precision Works, Professional Transmission

Tel : 86.135.3263.9595 | E-Mail : sales@e-smotor.com | www.e-smotor.com

Hall Encoder Specification

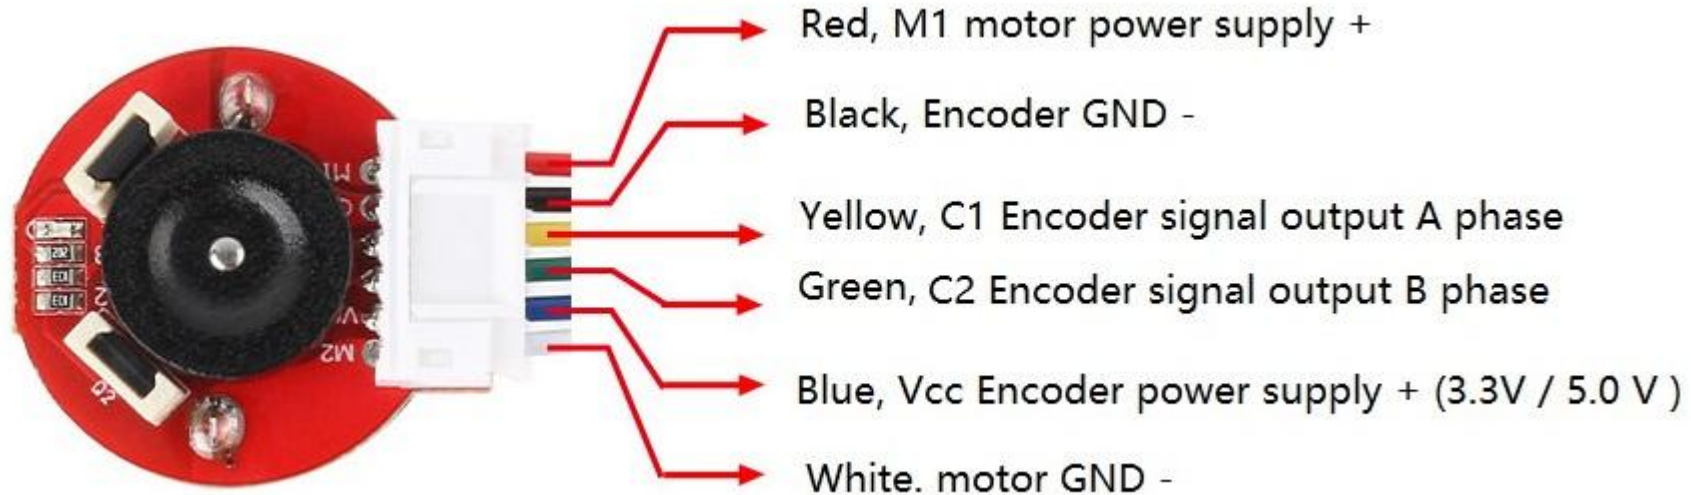

Item	Incremental magnetic Hall encoder with AB 2 phases
Input Voltage	3.3V / 5.0 V DC
Connector	PH2.0-6PIN
Output signal	Square AB phase
Response frequency	100K Hz
Basic pulse count	11 or 13 PPR
Pole of magnet disk	22 or 26 poles (11 or 13 pairs)



DONGGUAN E-S MOTOR CO.,LTD

Precision Works, Professional Transmission

Tel : 86.135.3263.9595 | E-Mail : sales@e-smotor.com | www.e-smotor.com