
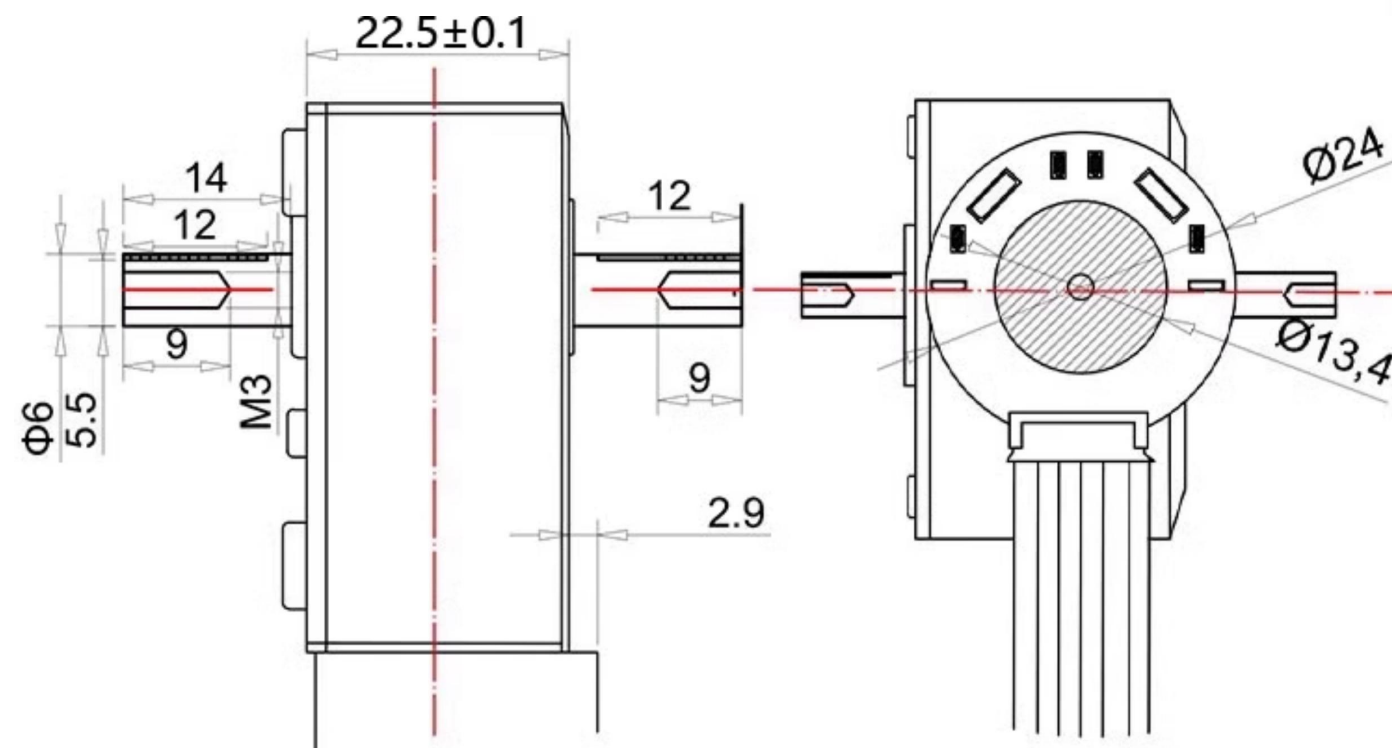


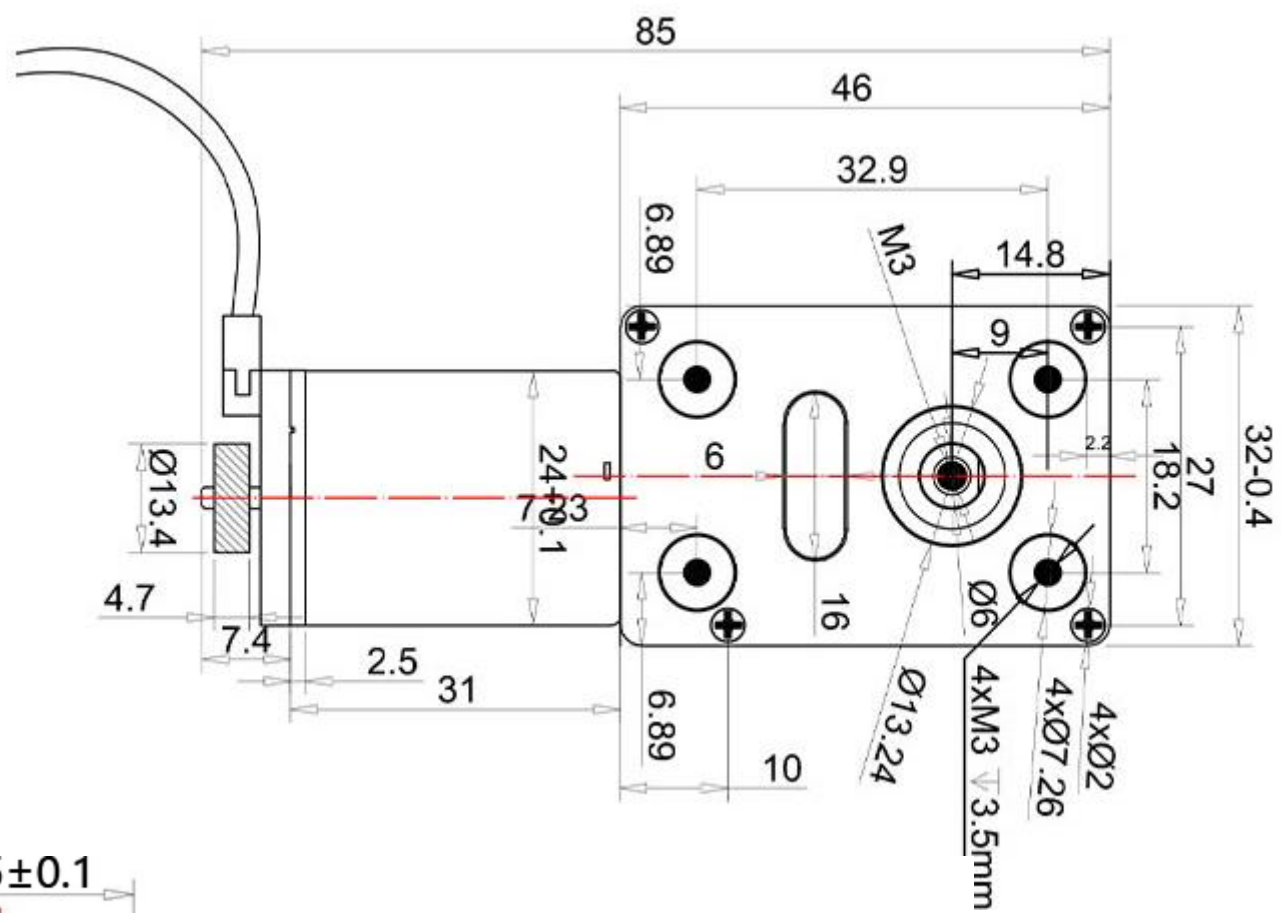

Wires connection :

Red : motor +

Black : motor GND

Green : Vcc GND

Blue : Vcc input Voltage 5 to 12 V

Yellow : Hall sensor A Vout, 11PPR

White : Hall sensor B Vout, 11PPR

4632WG-370CA-D-EN gear motor , 6V DC

Model	Gear ratio	No-load		Rated			At Stall	
		Speed rpm	Current mA	Speed rpm	Current A	Torque Kg.cm	Torque Kg.cm	Current A
4632WG-370CA-D-40-EN	40	150	< 100	120	< 0.6	0.2	0.9	3.3
4632WG-370CA-D-65-EN	65	90	< 100	70	< 0.6	0.5	1.6	3.3
4632WG-370CA-D-90-EN	90	66	< 100	51	< 0.6	0.7	2	3.3
4632WG-370CA-D-150-EN	150	40	< 100	30	< 0.6	2	7.5	3.3
4632WG-370CA-D-200-EN	200	30	< 100	22	< 0.6	5.3	10	3.3
4632WG-370CA-D-260-EN	260	23	< 100	18	< 0.6	6.7	13	3.3
4632WG-370CA-D-340-EN	340	18	< 100	15	< 0.6	9	18	3.3
4632WG-370CA-D-600-EN	600	10	< 100	7.5	< 0.6	15.9	30	3.3
4632WG-370CA-D-1000-EN	1000	6	< 100	4	< 0.6	26.5	45	3.3



DONGGUAN E-S MOTOR CO.,LTD

Precision Works, Professional Transmission

Tel : 86.135.3263.9595 | E-Mail : sales@e-smotor.com | www.e-smotor.com

4632WG-370CA-D-EN gear motor , 12V DC

Model	Gear ratio	No-load		Rated			At Stall	
		Speed rpm	Current mA	Speed rpm	Current A	Torque Kg.cm	Torque Kg.cm	Current A
4632WG-370CA-D-40-EN	40	150	< 60	120	< 0.6	0.2	0.9	1.7
4632WG-370CA-D-65-EN	65	90	< 60	70	< 0.6	0.5	1.6	1.7
4632WG-370CA-D-90-EN	90	66	< 60	51	< 0.6	0.7	2	1.7
4632WG-370CA-D-150-EN	150	40	< 60	30	< 0.6	2	7.5	1.7
4632WG-370CA-D-200-EN	200	30	< 60	22	< 0.6	5.3	10	1.7
4632WG-370CA-D-260-EN	260	23	< 60	18	< 0.6	6.7	13	1.7
4632WG-370CA-D-340-EN	340	18	< 60	15	< 0.6	9	18	1.7
4632WG-370CA-D-600-EN	600	10	< 60	7.5	< 0.6	15.9	30	1.7
4632WG-370CA-D-1000-EN	1000	6	< 60	4	< 0.6	26.5	45	1.7



DONGGUAN E-S MOTOR CO.,LTD

Precision Works, Professional Transmission

Tel : 86.135.3263.9595 | E-Mail : sales@e-smotor.com | www.e-smotor.com

4632WG-370CA-D-EN gear motor , 24V DC

Model	Gear ratio	No-load		Rated			At Stall	
		Speed rpm	Current mA	Speed rpm	Current A	Torque Kg.cm	Torque Kg.cm	Current A
4632WG-370CA-D-40-EN	40	150	< 40	120	< 0.6	0.2	0.9	0.85
4632WG-370CA-D-65-EN	65	90	< 40	70	< 0.6	0.5	1.6	0.85
4632WG-370CA-D-90-EN	90	66	< 40	51	< 0.6	0.7	2	0.85
4632WG-370CA-D-150-EN	150	40	< 40	30	< 0.6	2	7.5	0.85
4632WG-370CA-D-200-EN	200	30	< 40	22	< 0.6	5.3	10	0.85
4632WG-370CA-D-260-EN	260	23	< 40	18	< 0.6	6.7	13	0.85
4632WG-370CA-D-340-EN	340	18	< 40	15	< 0.6	9	18	0.85
4632WG-370CA-D-600-EN	600	10	< 40	7.5	< 0.6	15.9	30	0.85
4632WG-370CA-D-1000-EN	1000	6	< 40	4	< 0.6	26.5	45	0.85



DONGGUAN E-S MOTOR CO.,LTD

Precision Works, Professional Transmission

Tel : 86.135.3263.9595 | E-Mail : sales@e-smotor.com | www.e-smotor.com